

GV-BX1300 Series 1.3MP H.264 WDR D/N Box IP Camera

GV-BX1300-0F / 1F / 2F



GV-BX1300-3V



- 1.3 megapixel progressive scan CMOS
- Dual streams from H.264 and MJPEG
- Up to 30 fps at 1280 x 1024
- Built-in / external microphone
- 2-way audio
- One sensor input and alarm output
- TV-out support
- Built-in micro SD card slot (SD/SDHC) for local storage
- Mini USB slot for WiFi Adapter or USB hard drive
- Wide Dynamic Range (WDR)
- Defog
- Motion detection
- Tampering alarm
- Privacy mask
- IP address filtering
- DC 12V / PoE
- Removable IR-cut filter for Day/Night function
- Varifocal megapixel lens
- Supports iPhone, iPad, Android & 3GPP
- 31 languages on Web interface
- ONVIF (Profile S) conformant

* No Memory card slot & local storage function for Argentina.

Models

Models	Iris	Focal Length (mm)	Maximum Aperture	Image Format
BX1300-0F	Fixed	4 mm	F/1.5	1/3"
BX1300-1F	Fixed	8 mm	F/1.6	1/2.5"
BX1300-2F	Fixed	12 mm	F/1.4	1/2.7"
BX1300-3V	DC drive	2.8 ~ 12 mm	F/1.4	1/2.7"

Active Tampering Alarm

Tampered




Focus Change



Camera Shift



Dimensions

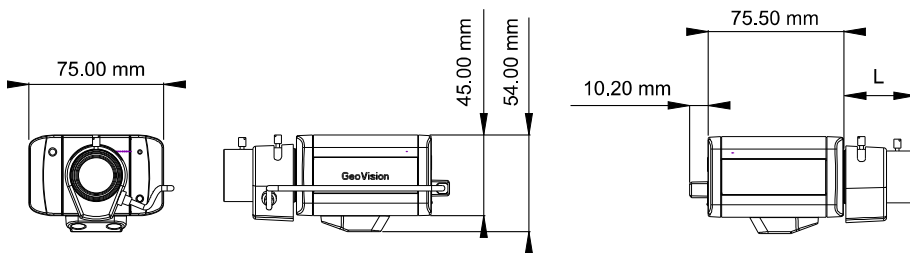

Model	L Length
BX1300-0F	15.7 mm (0.62")
BX1300-1F	15.7 mm (0.62")
BX1300-2F	15.7 mm (0.62")
BX1300-3V	39.5 mm (1.56")

Specifications

Camera		GV-BX1300-0F	GV-BX1300-1F	GV-BX1300-2F	GV-BX1300-3V
Image Sensor		1/2.5" progressive scan CMOS			
Picture Elements		1280 (H) x 1024 (V)			
Minimum Illumination	Color	0.15 Lux			
	B/W	0.10 Lux			
	IR ON	0 Lux			
Shutter Speed		Automatic, Manual (1/5 ~ 1/8000 sec)			
White Balance		Automatic, Manual (2800 ~ 8500K)			
Gain Control		Automatic			
S/N Ratio		45 dB			
BLC		Yes			
Lens					
Megapixel		Yes			
Day/Night		Yes (with removable IR-cut filter)			
Lens Type		Fixed			Varifocal
Focal Length		4 mm	8 mm	12 mm	2.8 ~ 12 mm
Maximum Aperture		F/1.5	F/1.6	F/1.6	F/1.4
Mount		CS Mount			
Image Format		1/3"	1/2.5"	1/2.5"	1/2.7"
Horizontal FOV		49°	26°	17°	64°~23°
Operation	Focus	Manual			Manual (w/lock)
	Zoom	Fixed			Manual (w/lock)
	Iris	Fixed			DC drive
Torque (Focus/Zoom screws)		0.049 N.m			
Operation					
Video Compression		H.264, MJPEG			
Video Streaming		Dual streams from H.264 or MJPEG			
Frame Rate		30 fps at 1280 x 1024 * The frame rate and performance may vary depending on the number of connections and data bitrates (different scenes).			
Image Setting		Brightness, Contrast, Saturation, Sharpness, Gamma, White Balance, Flicker-less, Image Orientation, Shutter Speed, D/N Sensitivity, Backlight Compensation, WDR, Defog			
Audio Compression		G.711, AAC (optional)			
Audio Support		Two-Way Audio			
Sensor Input		1 input (Dry Contact)			
Alarm Output		1 Digital Output (200mA 5V DC)			
Video Resolution					
Main Stream	4:3	1280 x 960, 640 x 480, 320 x 240			
	16:9	1280 x 720, 640 x 360, 448 x 252			
	5:4	1280 x 1024, 640 x 512, 320 x 256			
Sub Stream	4:3	640 x 480, 320 x 240			
	16:9	640 x 360, 448 x 252			
	5:4	640 x 512, 320 x 256			
Network					
Interface		10/100 Ethernet			
Protocol		HTTP, HTTPS, TCP, UDP, SMTP, FTP, DHCP, NTP, UPnP, DynDNS, 3GPP/ISMA, RTSP, PSIA, SNMP, QoS (DSCP), ONVIF (Profile S)			
Wireless LAN		IEEE 802.11 b/g/n			
Antenna Type		External			
Security		WEP, WPA-PSK(TKIP), WPA-PSK(AES), WPA2-PSK(TKIP), WPA2-PSK(AES)			
Mechanical					
Temperature Detector		Yes			
Connectors	Power	2-pin terminal block, PoE			
	Ethernet	RJ-45			
	Audio	1 In (Using the built-in microphone or externally connecting a microphone) 1 Out (Stereo phone jack, 3.5 mm / 0.14 in)			
	Digital I/O	3-pin terminal block, pitch 2.5 mm / 0.1 in			
	Auto Iris	Yes (with varifocal lens)			
	Local Storage	Micro SD card slot (SD/SDHC, SD version 2.0 only, Class 10) *SDXC and UHS-I card types are not supported.			
	TV-Out	BNC connector (640 x 480 resolution)			

Mechanical		
Connectors	Mini USB	GV-WiFi Adapter or USB hard drive
LED Indicator		2 LEDs: Power, Status
General		
Operating Temperature		0 °C ~ 50 °C / 32 °F ~ 122 °F
Humidity		10% to 90% (no condensation)
Power Source		12V DC / PoE
Max. Power Consumption		9.5W
Dimensions (L X W X H)		75.5 x75 x 54 mm / 2.97 x 2.95 x 2.13 in (without lens)
Weight		300 g / 0.66 lb
Regulatory		CE, FCC, C-Tick, RoHS compliant
Power over Ethernet		
PoE Standard		IEEE 802.3af Class 3 Power over Ethernet / PD
PoE Power Supply Type		End-Span
PoE Power Output		Per Port 48V DC, 350mA. Max. 15.4 watts
Web Interface		
Installation Management		Web-based configuration
Maintenance		Firmware upgrade through Web Browser or Utility
Access from Web Browser		Camera Live View, Video Recording, Change Video Quality, Bandwidth Control, Image Snapshot, Digital I/O control, Audio, Picture in Picture, Picture and Picture, Privacy Mask, Visual Automation, Tampering Alarm, Text Overlay, Digital PTZ
Language		Arabic / Bulgarian / Czech / Danish / Dutch / English / Finnish / French / German / Greek / Hebrew / Hungarian / Indonesian / Italian / Japanese / Lithuanian / Norwegian / Persian / Polish / Portuguese / Romanian / Russian / Serbian / Simplified Chinese / Slovakian / Slovenian / Spanish / Swedish / Thai / Traditional Chinese / Turkish
Applications		
Network Storage		GV-NVR, GV-System, GV-Backup Center, GV-Recording Server
Smart Device Access		GV-Eye for Android smartphone, tablet, iPhone, and iPod Touch GV-Eye HD for iPad
Live Viewing		IE, mobile phone
CMS Server support		GV-Control Center, GV-Center V2, GV-VSM


Note:

1. The signal range and data throughput may vary depending on the network conditions and environmental factors.
2. Mind the following limitations and requirements for the mini USB port:
 - The USB hard drive must be of 2.5" or 3.5", version 2.0 or above
 - The USB hard drive's storage capacity must not exceed 2TB
 - USB flash drives and USB hubs are not supported
 - External power supply is required for the USB hard drive
3. Specifications are subject to change without notice.
4. Mind the following when using a memory card for recording:
 - Recorded data on the memory card can be damaged or lost if the data are accessed while the camera is under physical shock, power interruption, memory card detachment or when the memory card reaches the end of its lifespan. No guarantee is provided for such causes.
 - To avoid power outage, it is highly suggested to apply a battery backup (UPS).
 - For better performance, it is highly suggested to use Micro SD card of MLC NAND flash, Class 10.
 - Replace the memory card when its read/write speed is lower than 6 MB/s or when the memory card is frequently undetected by the camera.

Packing List

- | | |
|--|-------------------------------------|
| 1. Box Camera | 6. Camera Holder |
| 2. Terminal Block | 7. GV-IPCAM H.264 Quick Start Guide |
| 3. Fixed Focal or Varifocal Megapixel Lens | 8. GV-IPCAM H.264 Software CD |
| 4. Six Lens Rings | 9. GV-NVR Quick Start Guide |
| 5. Video Out Wire | 10. GV-NVR Software DVD |

Accessories

Model No.	Name	Details
	Convex Corner Adapter Kit	
GV-Mount300		Dimensions: 238.6 x 409.5 mm (9.4" x 16.1") Weight: 4.27 Kg (9.41 lb)
	Concave Corner Adapter Kit	
GV-Mount310		Dimensions: 123.3 x 393.1 mm (4.9" x 15.5") Weight: 2.96 Kg (6.53 lb)
	Pole Mount Bracket Kit (Ø 4" ~ 6")	
GV-Mount400		Dimensions Bracket: 241 x 161 mm (9.5" x 6.3") Weight: 1.70 Kg (3.75 lb) Steel Strap Diameter: Ø 4" ~ 6"
	Pole Mount Bracket Kit (Ø 6" ~ 7.5")	
GV-Mount410		Dimensions Bracket: 241 x 161 mm (9.5" x 6.3") Weight: 1.70 Kg (3.75 lb) Steel Strap Diameter: Ø 6" ~ 7.5"
	Housing Box (with heater and fan)	
GV-Housing101	 IP67 IK10	Dimensions: 406 x 145 x 109 mm (16 x 5.7 x 4.3") Weight: 4.69 Kg (10.34 lbs) (including Supporting Tube) Start-up Temperature: -30°C ~ 50°C (-22°F ~ 122°F) Operation Temperature: -40°C ~ 50°C (-40°F ~ 122°F) Heater: 15°C (59°F) On / 25°C (77°F) Off Fan: 35°C (95°F) On / 25°C (77°F) Off Power board: 24V AC or 12V DC input
	GV-IR LED T2	
		Weight: 140 g / 0.31 lbs Dimensions (H x W x D): 49 x 47 x 67 mm / 1.93 x 1.85 x 2.64 in
	GV-PA191 PoE Adapter	
		Weight: 130 g / 0.29 lb Dimensions (H x W x D): 43 x 69 x 40 mm / 1.69 x 2.72 x 1.57 in
	GV-Relay V2	
		The GV-Relay V2 is designed to expand the voltage load of GV IP devices. It provides 4 relay outputs, and each can be set as normally open (NO) or normally closed (NC) independently as per your requirement.

Model No. Name	Details
Power Adapter	Power adapters are available in 4 regions: U.S.A., Australia, U.K and Europe.
GV-POE Switch	The GV-POE Switch is designed to provide power along with network connection for IP devices. The GV-POE Switch is available in various models with different numbers and types of ports.

GV-WiFi Adaptor



Weight: 20 g / 0.04 lb
 Dimensions (H x W x D): 15 x 15 x 155 (mm) / 0.59 x 0.59 x 6.10 (in)
 Supplied with mini USB to standard USB adapter.